

FIG. 1

PRIOR ART

Time-delay fiber-based interferometric receiver using a photo-emf sensor

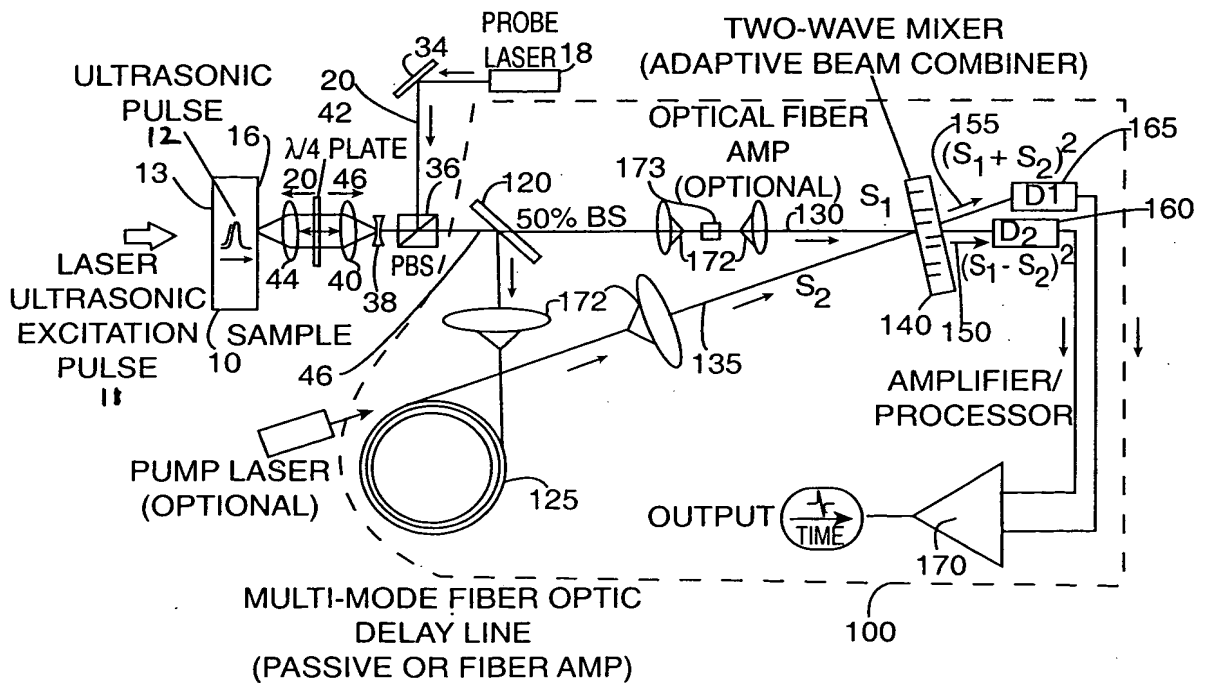


FIG. 2

Time-delay fiber-based coherent detection system using an adaptive beam combiner (a two-wave mixer).

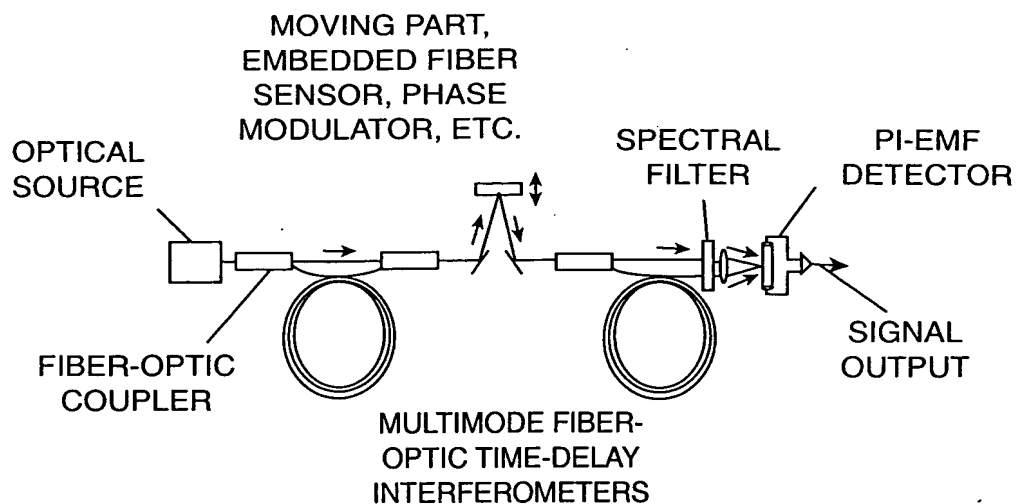


FIG. 3

PRIOR ART

Dual-fiber time-delay line system using  
a photo-emf sensor

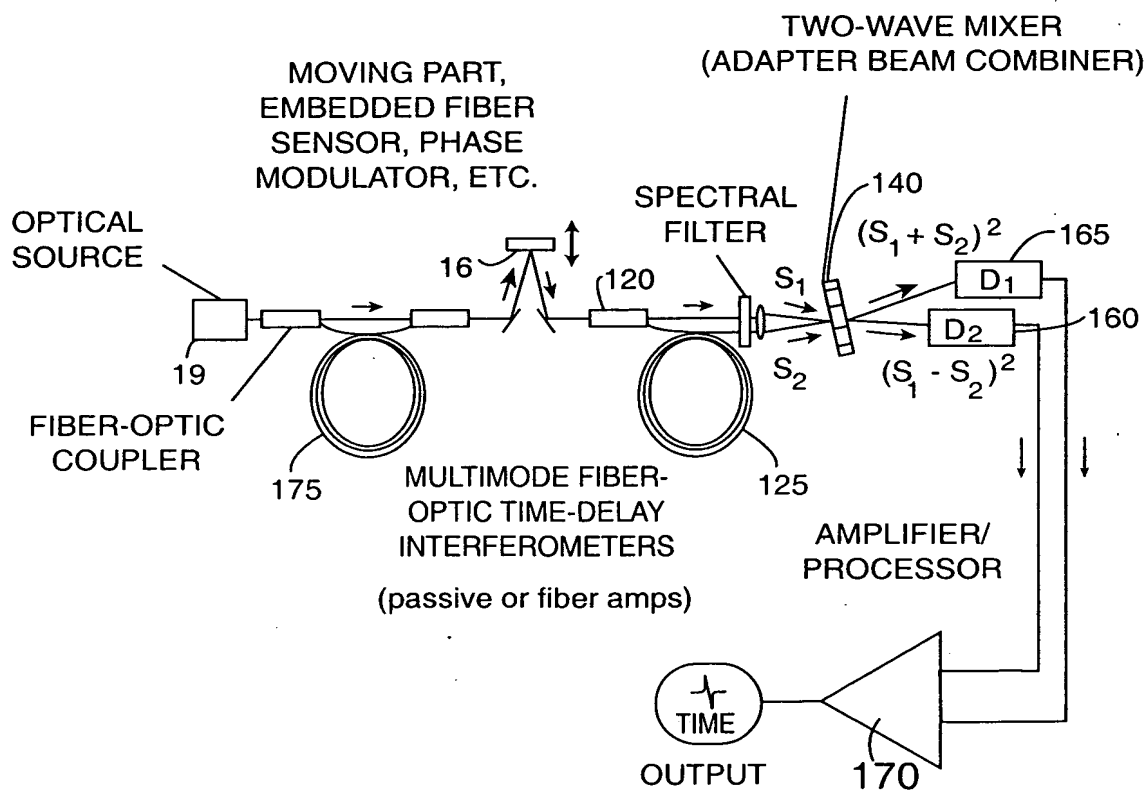


FIG 4.

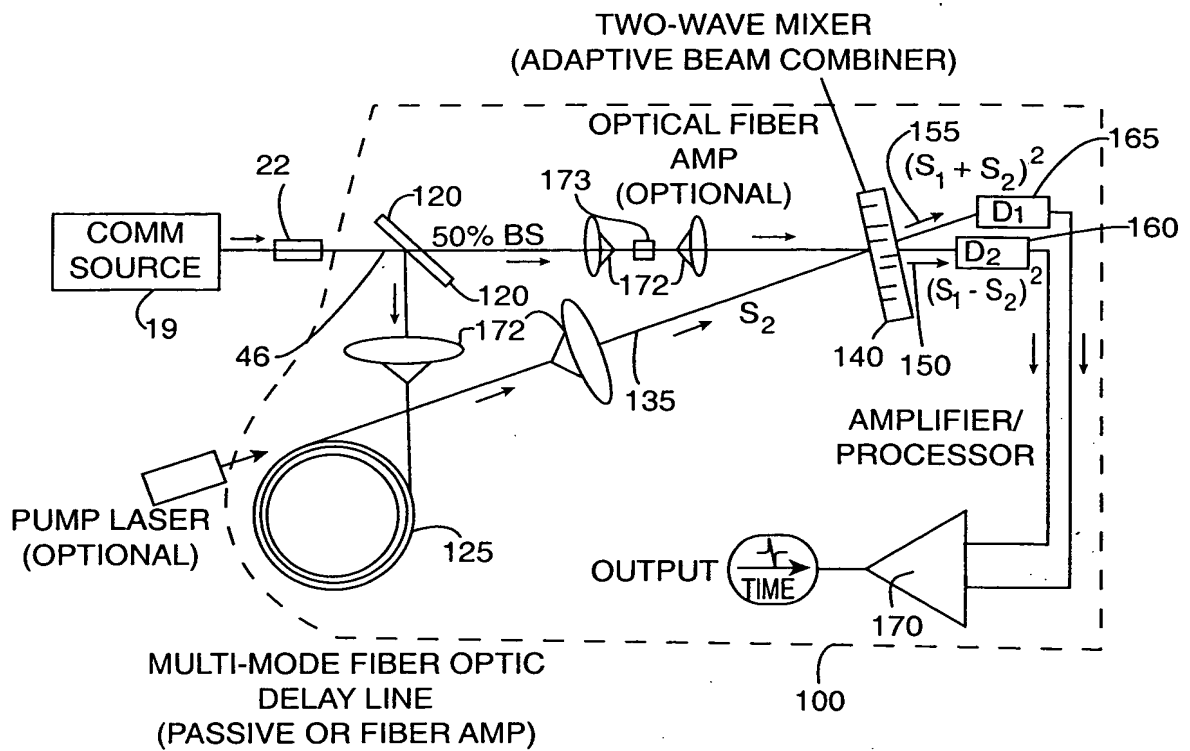


FIG. 5

Time-delay fiber-based coherent detection system using an adaptive beam combiner (a two-wave mixer).

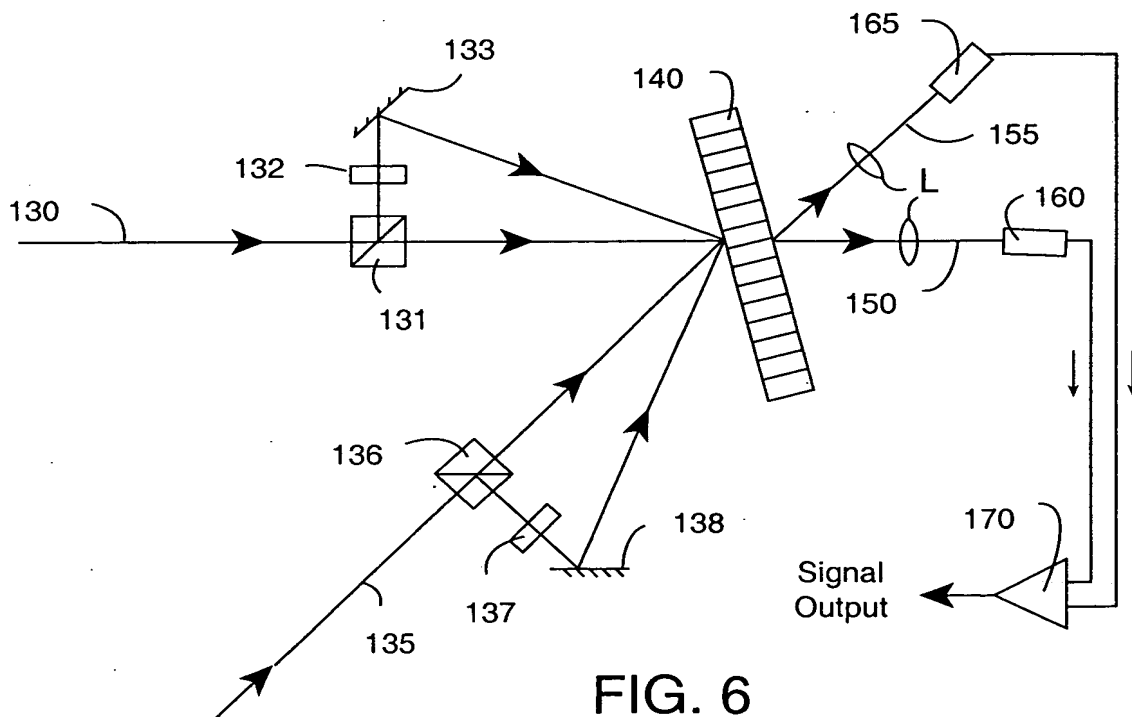


FIG. 6